

- 1. (22) -

5.

가

#110

5.1


(1)

1)

(8,000rpm)

< 5-

1>.

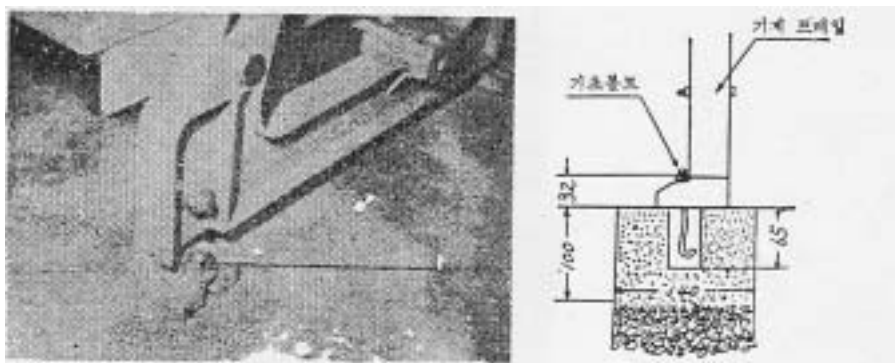


< 5-1>

2)

<

5-2>.

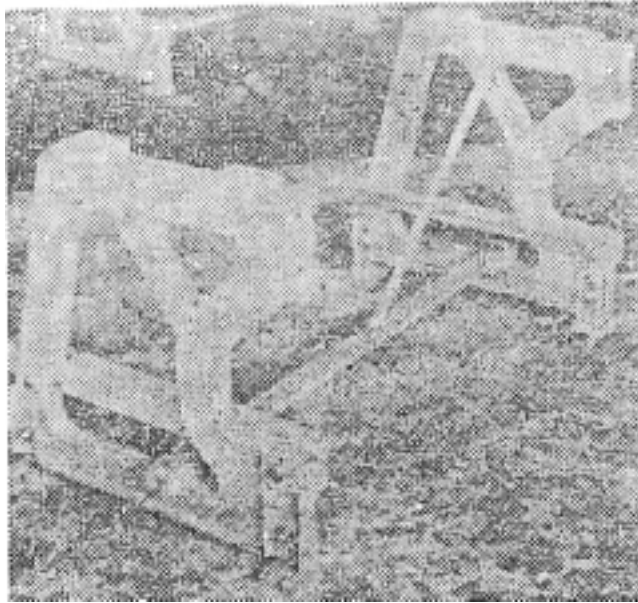

< 5-2>



< 5-3>

< 5-3>.

2

85mm


3)

a)

가 (yarn guide),

가

< 5-4>.

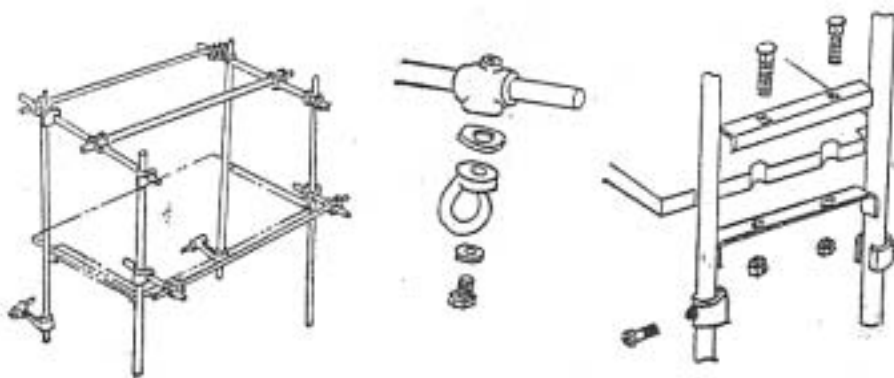


< 5-4>

(peg)

< 5-5>


(blower)

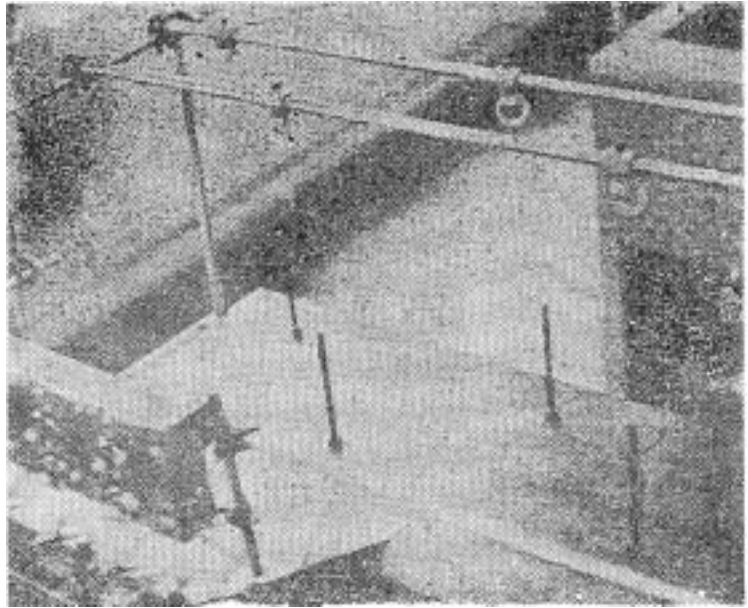

< 5-5>

b) (compensator)

< 5-6>.

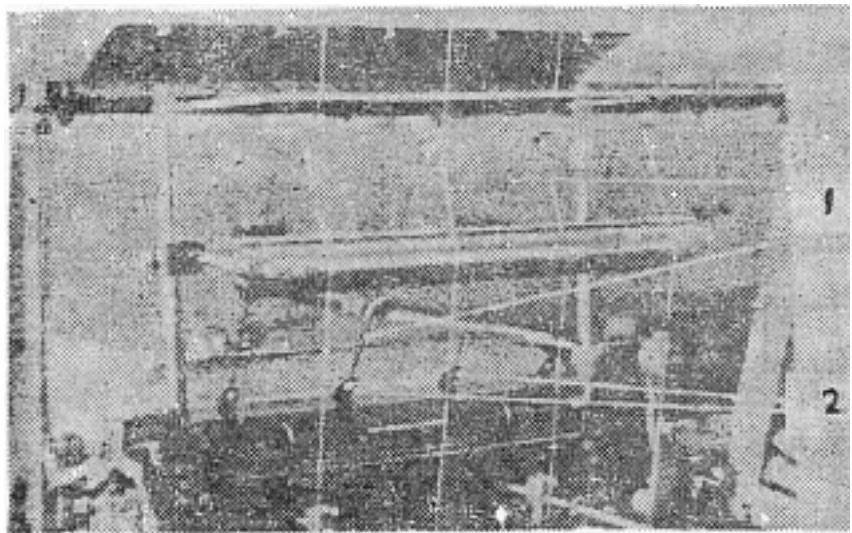

(rod)


(holder)

< 5-6>

(compensator)

c) (tensor) (dust cover)

< 5-7>.

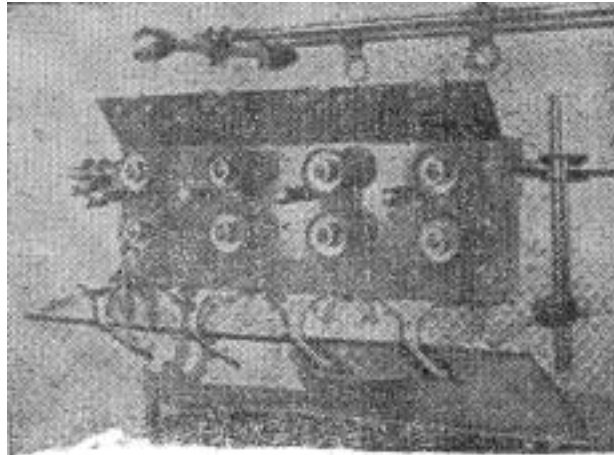

< 5-7> (tensor) (dust cover)


d) (magazine)

(front chute)


(back chute)

2

< 5-8,9>.

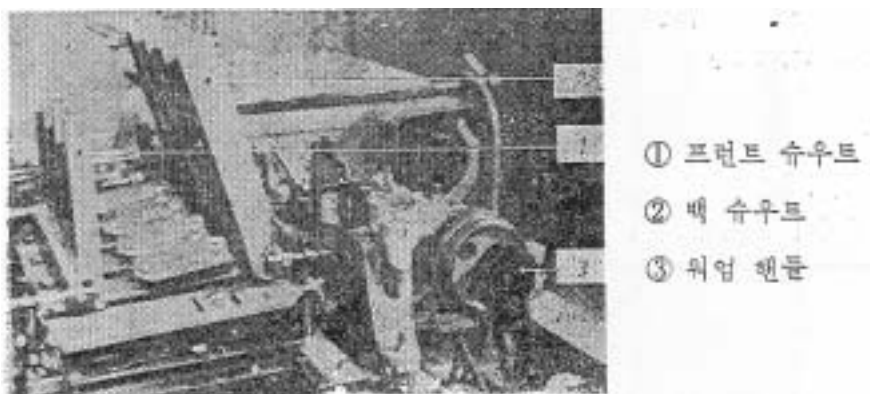

< 5-8> (magazine)

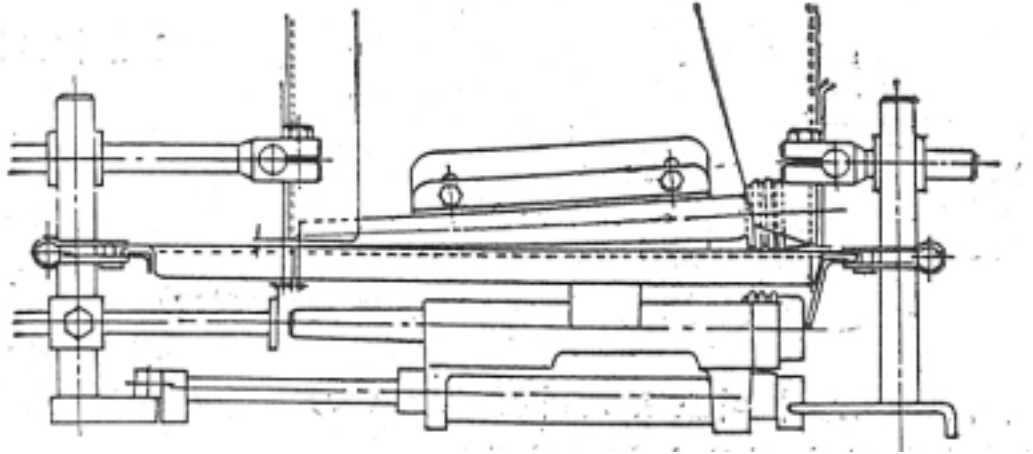

< 5-9> (magazine plate)

e) (conveyer)


(sliding carriage frame)

가

V

(collar)

< 5-10>.

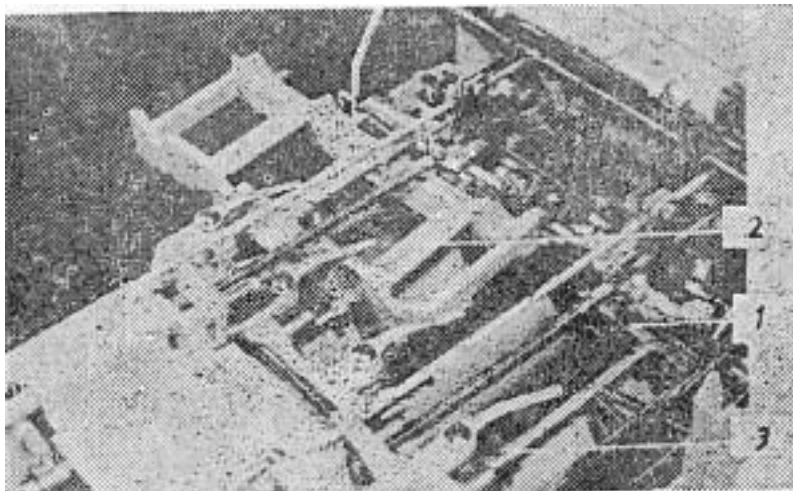

(collar)


< 5-10> (carriage)

(slide carriage frame)


f)

.

< 5-11, 5-12>.

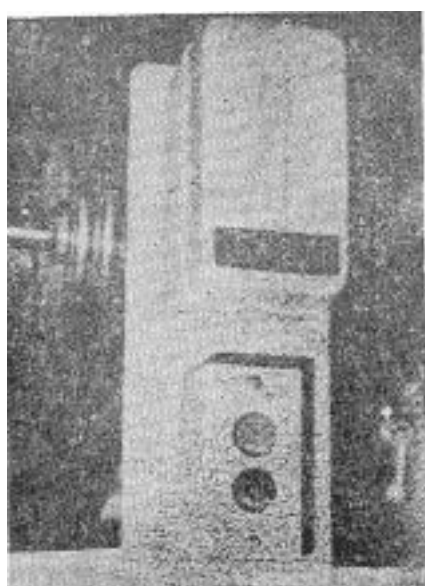

< 5-11>

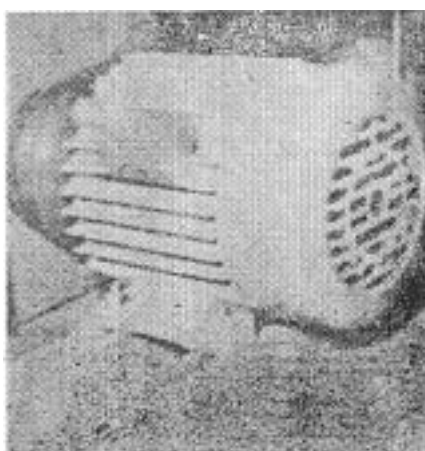


< 5-12>

g)

가 .
가

h)

< 5-13>.

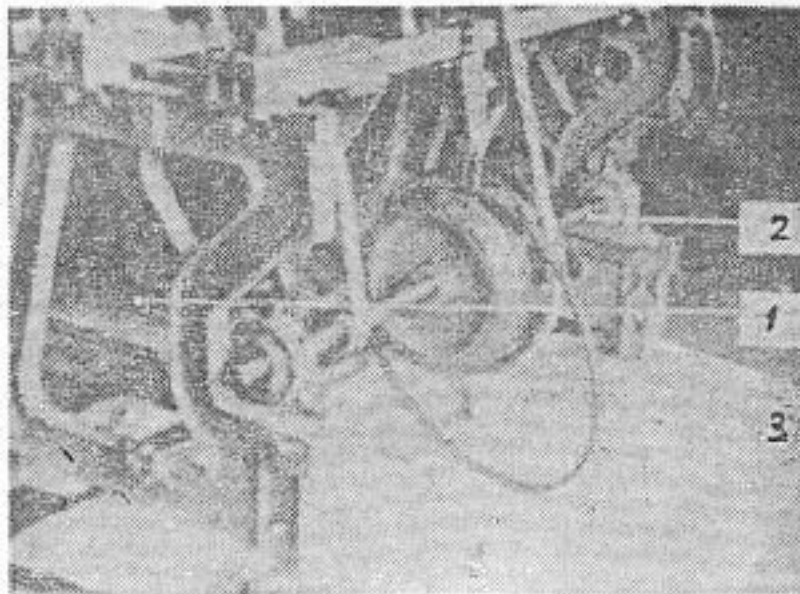

V

< 5-13> (driving shaft)

가 가

i)

.

4)

a)

.

b)

가

.

c)

.

d)

.

e)