


(3)

1)

	1. ( , , 가 ) 2. 가 가 3. ( )	
2	1. 2.	
	1. (accelerator wire) 가 2. 가 가 3.	T 14 mm
	1. 가 2. 가 가 3. (pipe knock) 4. 5. 6. 7. 8. 가 9. (pressure roll)	(knocker)          14mm
3	1. 2.	
6	1. 가 2. 3. V 4. (grease)	14mm  6~7mm
1	1.	

	2.	
	3.	

2) < 5-59>

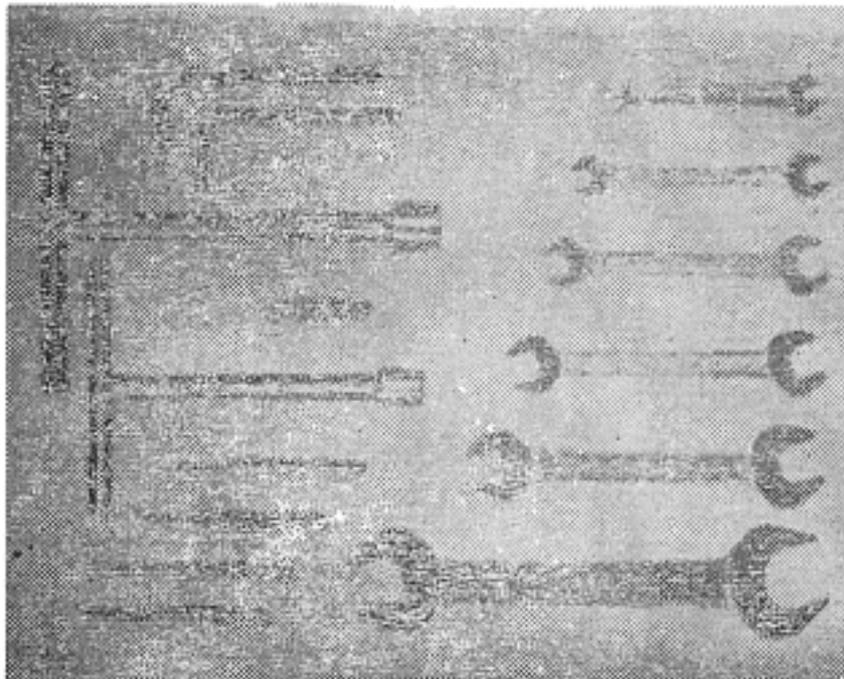

< 5-59>

(wrench)	4mm, 5mm, 6mm 10mm, 14mm
(knocher)	2.5, 2, 3, 4, 5
(spanner)	21 × 26, 14 × 17, 12 × 14, 10 × 12, 8 × 9, 6 × 7
(slel) (tool)	

5.3

(1)

1)

1

(oil level mark)

가

1~3

(shifter)

(A)

(B)

가

<

5-60>.



<

5-60>

(worm handle)

2)


(dial indicator) “0”  
가 ,

a) (glass)  
가

b) (oil distributing plate)

< 5-61>.

c) 가 , 가 , ,

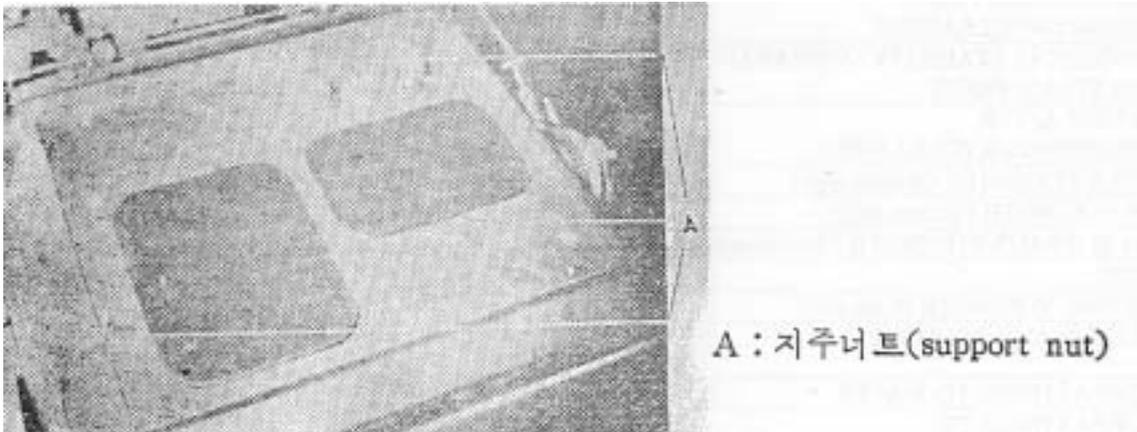

< 5-61> (oil distributing plate) (support nut)

3)



d) 가 , (carrier) (holding)  
(lever) 가.

e)

가

f)

g)

h)

i)

4)

3 V

6,000, 7,000 8,000

2 가

1 가

4


(2)

1)


(peg)

(ring) 가

< 5-64>

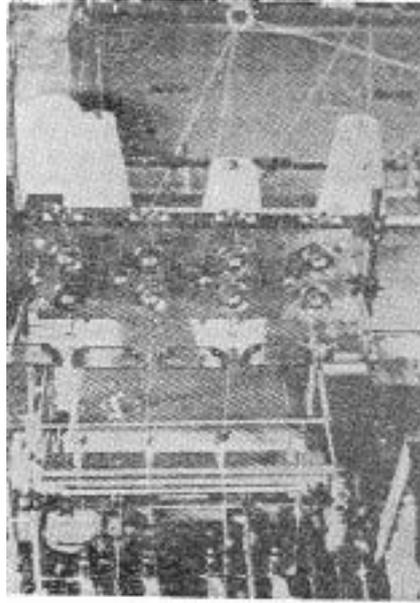

< 5-64>

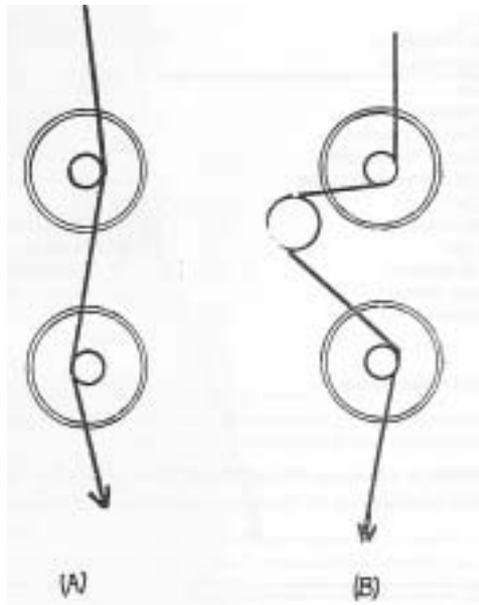

(A) (unit tensor) -

(B) (high tension) - 60g


< 5-65>

60g

B


A

< 5-65>

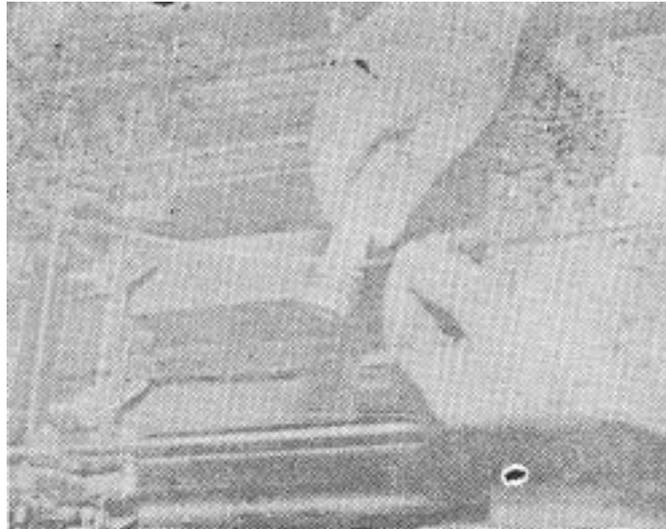

< 5-66>

(4~5 )

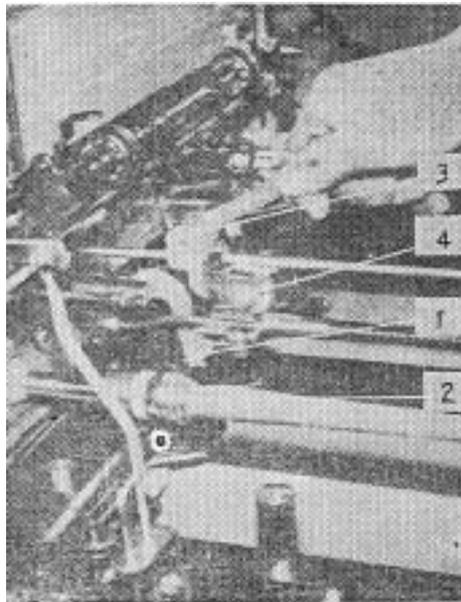

- ① 야안 가이드
- ② 목관의 번치 홈
- ③ 볼트
- ④ 야안 가이드 브래킷

< 5-67>

(spindle head)

(bobbin roller)

2)

4~5


가

< 5-66, 5-67>.

3)

가

(notch pin)

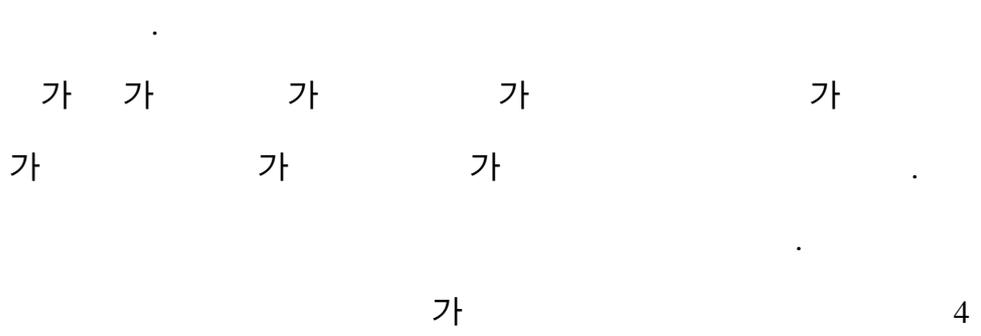

4)

가

(19)가

가

(locating

piece) (17) < 5-68>.


2 1

가 가

가 가


(set pin)

< 5-69>.

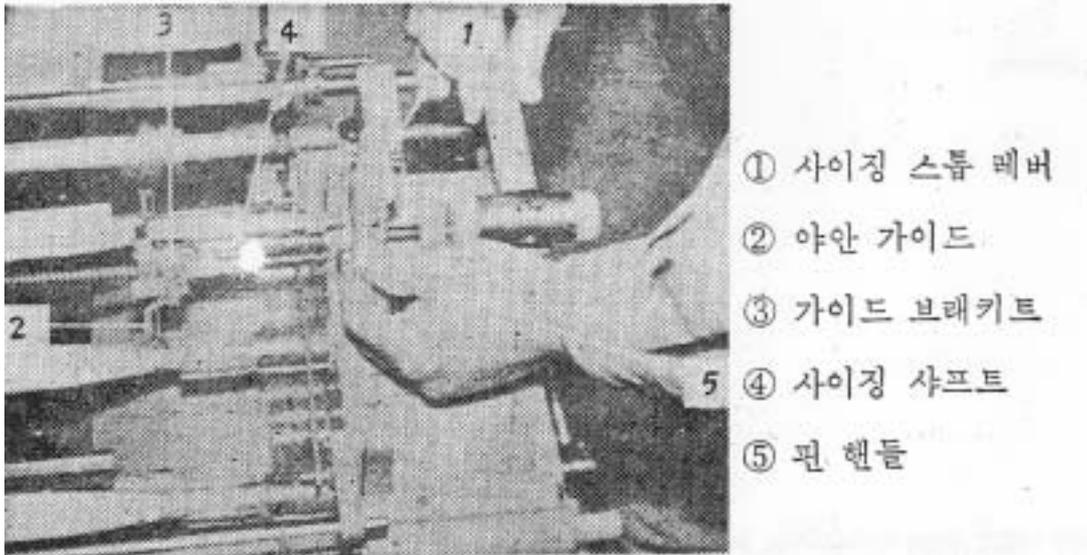

< 5-68>

(locating piece)

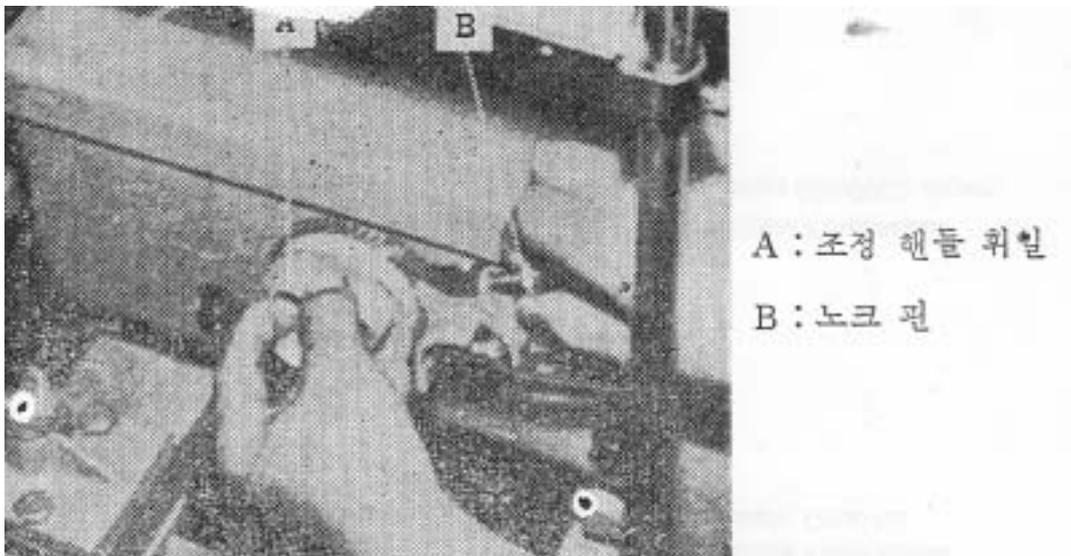

< 5-69>

(dial)