



(12)

7.3

1) (Pin holes) < 37>

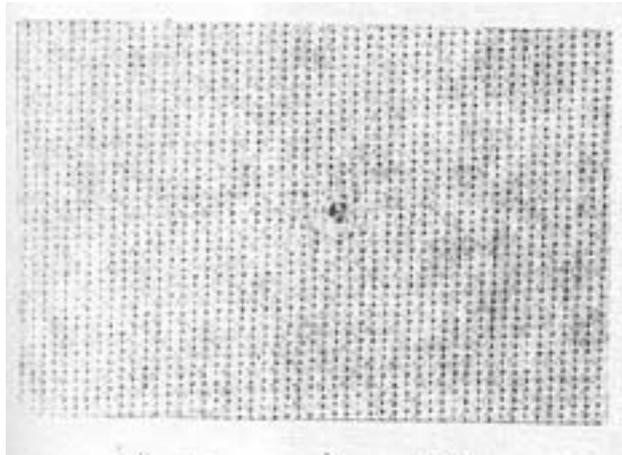


< 37>

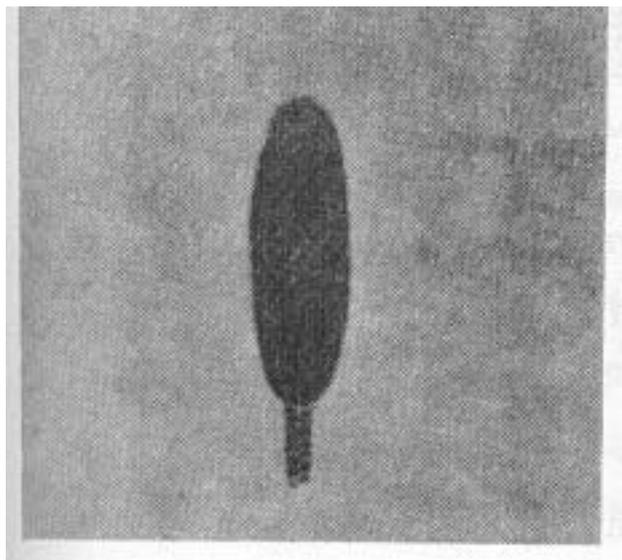

< 38>

3) (Fissure, Tear)

( )가 가, .

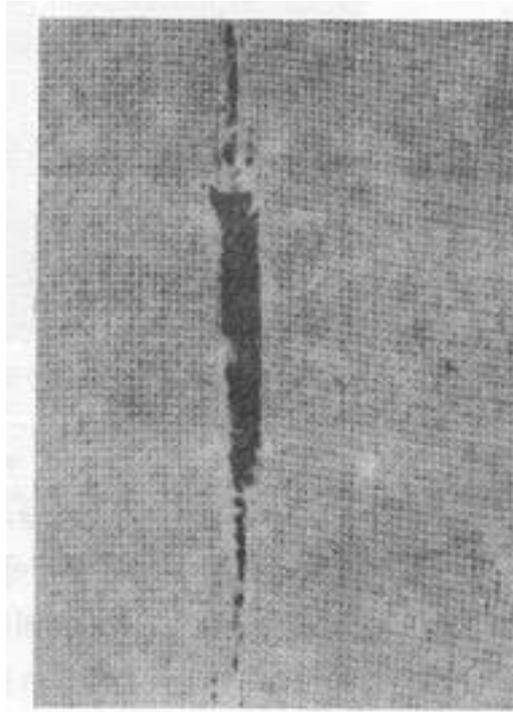

< 39>

4) ( 40 ) Mending defect

,  
가


5) Gout, Foreign matter

, ( )


6) (Tight Warp) < 41>

( ) 가 .

, Beam flange  
 , Beam , Tough Roller  
 , ( ) 가 Tension

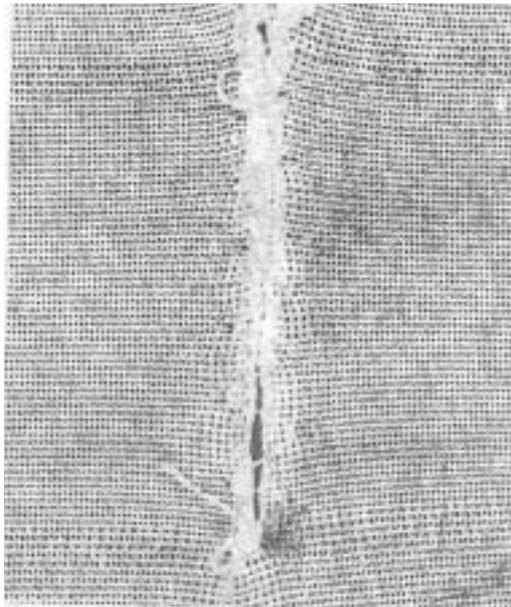

< 40 >

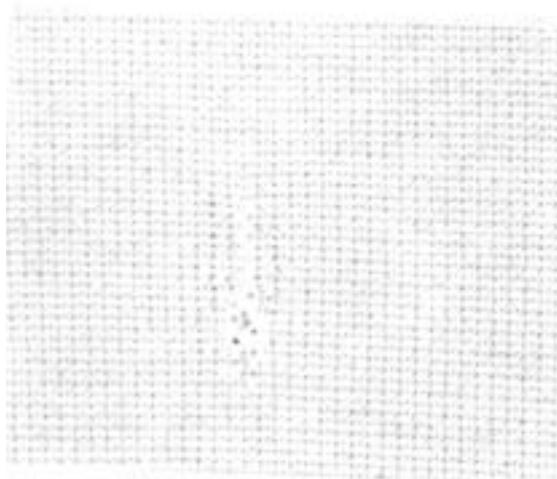

< 41 >

7) Abrasion

( )가

8) Pile Uneven pile

Sinker

Timing

Pile

Beam

, Sinker

, Sinker Timing

9) Knot

1)~9) 가


### 7.4

,  
,  
< 42>, , , ,  
가

### 7.5

, 가 가 .  
,  
Beam , , , , ,

, , , Cut mark , , , , .

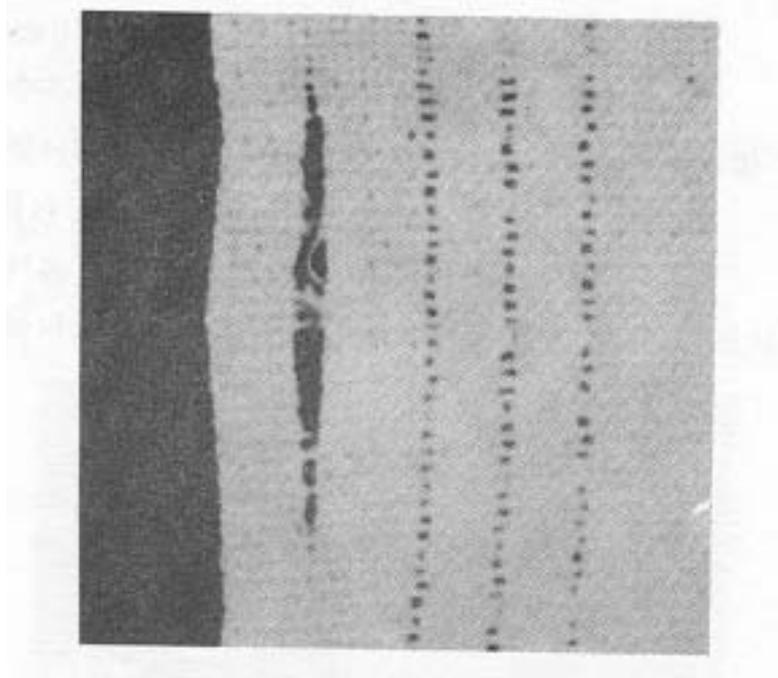

< 42 >

## 7.6


1) (Broken design, Broken pattern) < 43 >

2) (Uneven density) < 44 >


가

, ,

가

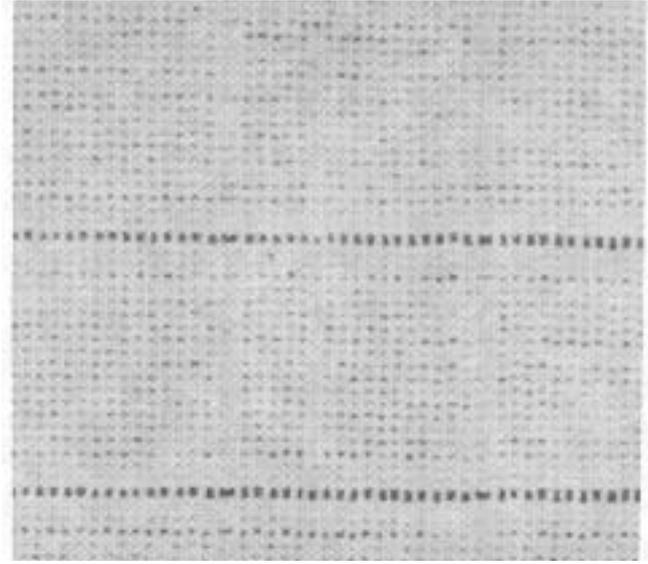

< 43>

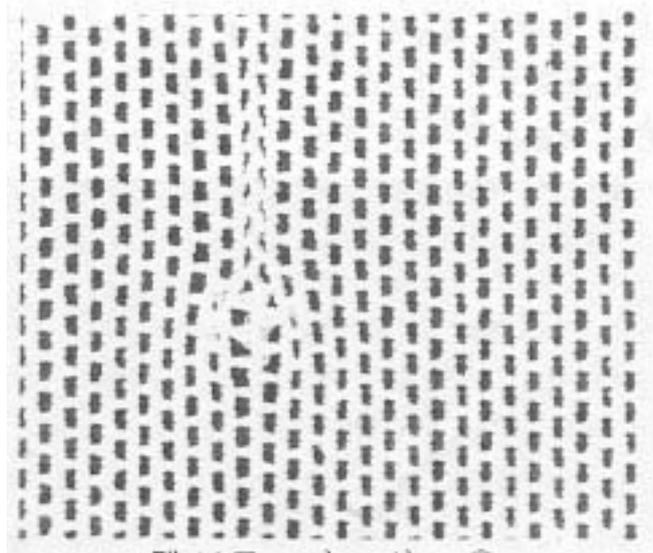

< 44>

3)

( ) Irregular stitches

( )

Beam

, ( ) ,  
 .  
 1)~ 3) 가 .