


Rieter社 C60

10 ,
가 .
 , C60
 ,
(1).
가
CX .

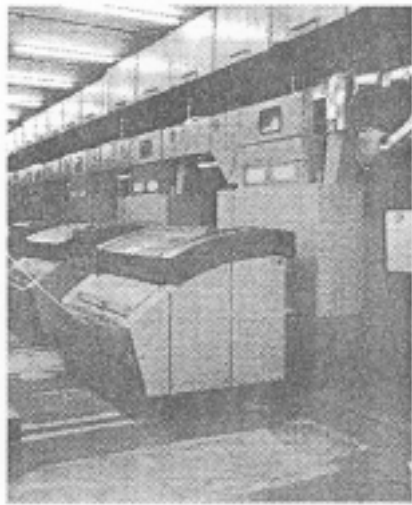

< 1> C60

1.

가 .

(1)

가 , 가 .
(2)

,
.
,
.

(3) :
.

Rieter社 “ VarioSet ”

.

2.

, C51 Hiper , C60
50% 가 .
가 . 가
,
,
C51 가
가 . C60
.

- 1,500mm 50% 가
- 가

●

3

가


.

150kg/

C60

90kg/

(2).

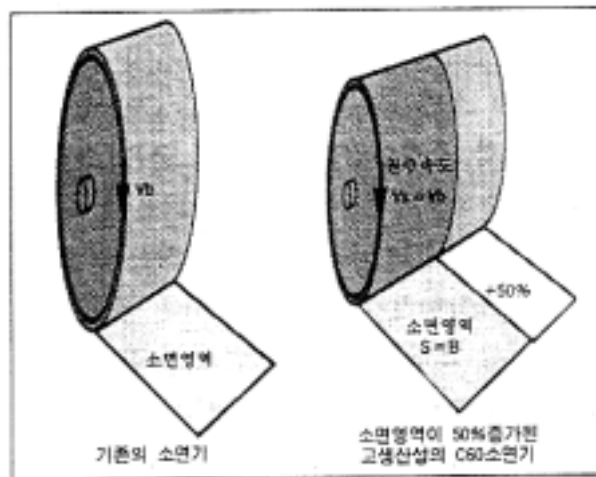

< 2>

가

1m

가

가

(: 120

kg/

6.6 ktex).

가

,

. C60

(loading) 50%

.

(CBA-4)가

,

.

가 (3.5 6ktex)가

,

가


(SB)

. 가 (RSB)
OE .

3.

IGS-classic IGS-top
가

C60

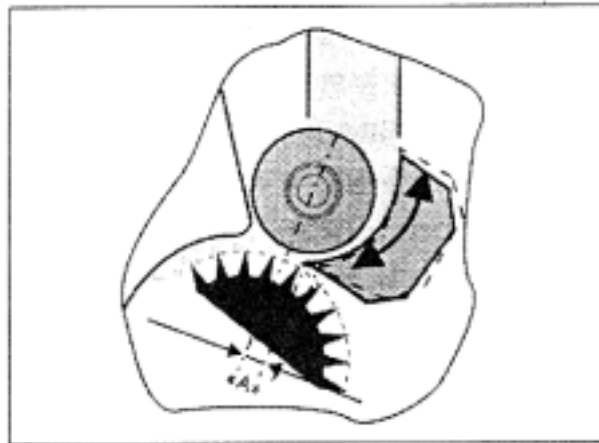

< 3> trough


● feeder trough (3)

●

(4)

●

,

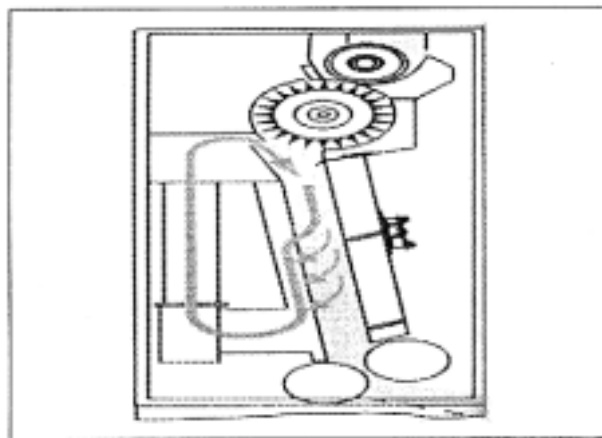

< 4 >

4.

C60

,

3

,

(/)

가

가 50% 가 .

RSB

Rieter社 .

가 RSB

.

(5).

C60

50%

,

(2.0

2.5)가 가

가 .

8-12 ktex ,

가 .

.



< 5> RSB

5.

C60

가

가

-
-
-
-

50%

(, 3
) . IGS-classic

가 가

, 가

20 600kg/ 15 가 ,

4 5 .

7% , 20 25% . C60

Rieter社

C60


(6).

● 가 .

● .

(.)

● .

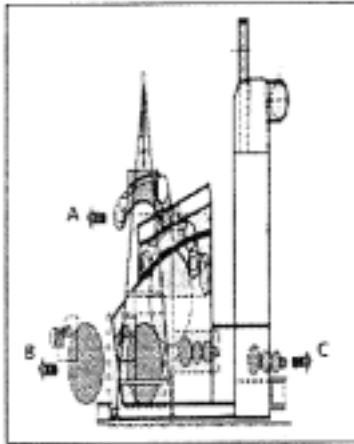

A: , B: , C:

< 6>

6.

가

가

가

60kg/

. RSB

C60

160kg/ C60

(, ,

,)

. / , 100%

50% 가가 . ♠

(A new dimension in carding: ITB 6/2002)