


1.

R40 가 SC-R  
(spinning box) ( 1, 2 ). Rieter社  
Suessen社 . Suessen社

30

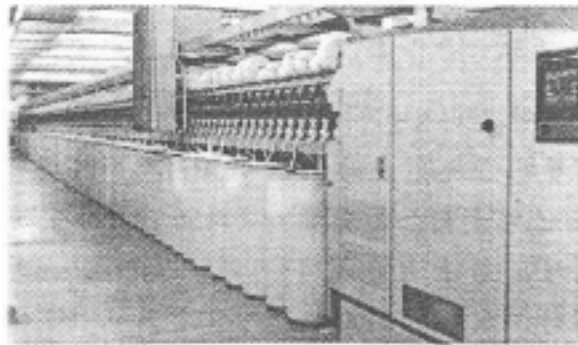

< 1 > R40 (320 )



< 2 > SC-R

250

. R40

SC-R

SC-M

,

SC-R

.

**2. R20**

**R40**

R20

R40

. (piecing)

(robot)

. 가

. Rieter社

. R20

가

가 , R40

.

**3.**

R40

SC-R

.

가 “BYpass”( 3 )

. “BYpass ”

가 가 . “ BYpass ”

,

,

.

,

가

.

(fixed fiber beard support)

,


SC-R

가

(step seal)

가

SC-R

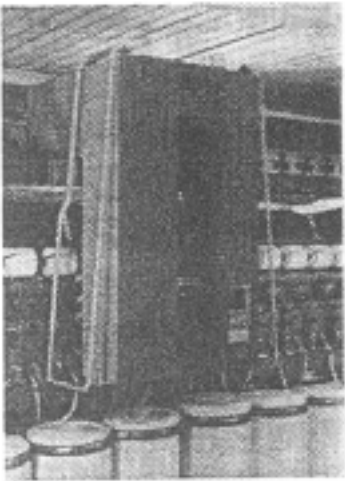

< 3 > SC-R “BYpass”

4.

가

가

,

R40 .

● : 150,000rpm

● : 235m/min

● : 320

● : 가 (18.5 ) 2

245mm

● : 340mm, 5kg

5.

.

R40 150,000rpm 120,000rpm

.

6.

R20 R40

.

.

,

.

. R20

, R40

가

,

.

.

가

.

.

.

## 7. 가

.

●

,

●

가 “SPEEDpass”

●

,

,

●

, (soft-twisted)

,

“TWISTstop“

## 8.

R40

R20

.

“UNIfeed”

.

R40

18.5inch

5kg

R20

가

R40

“VSB”(variable stroke box)

가

“VARIOdraft”

가 ,

( 4 )

R20

Rieter社



< 4 >

R40

- section(20 )

가

가

가

.

- 

가

.

- 

.

♠

(Profitable innovations in rotor spinning: ITB, 5/2002)