

(2)

(group linking system)

가

. 60

3

20

3

(tray to tray)

가

가

, 가

○

:

가

:

1

가

가

: 가

○

5:

(1 1)

가

가

3

1

Mach coner


1

1


가

가

, 가

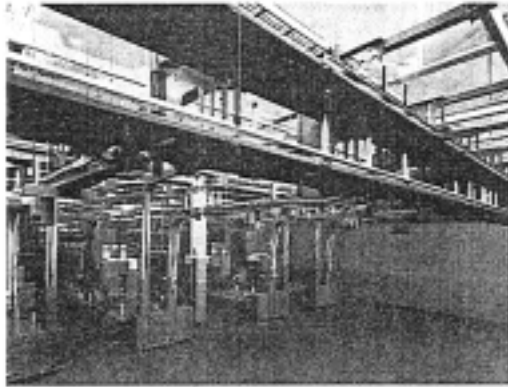

< 23>

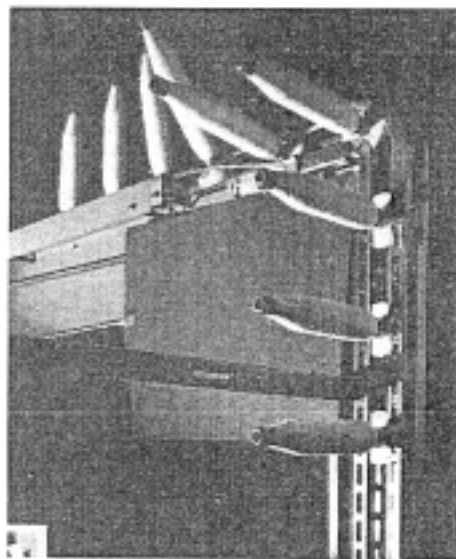


< 24>

○ 6 :

○

가

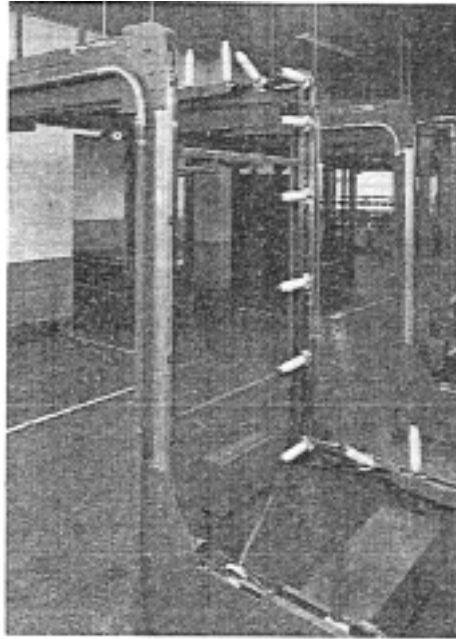


< 25>

가


70

180

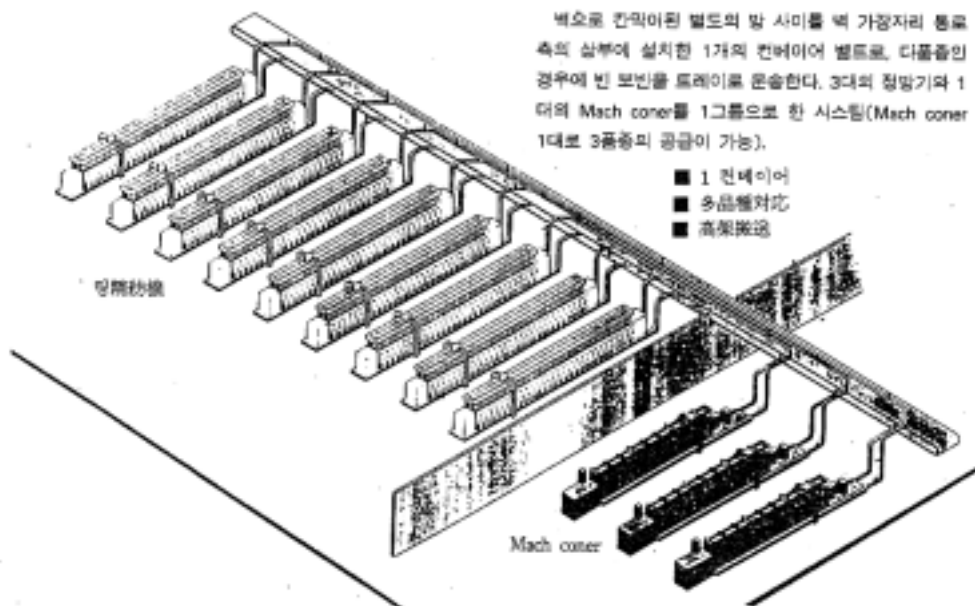

< 26>

5()

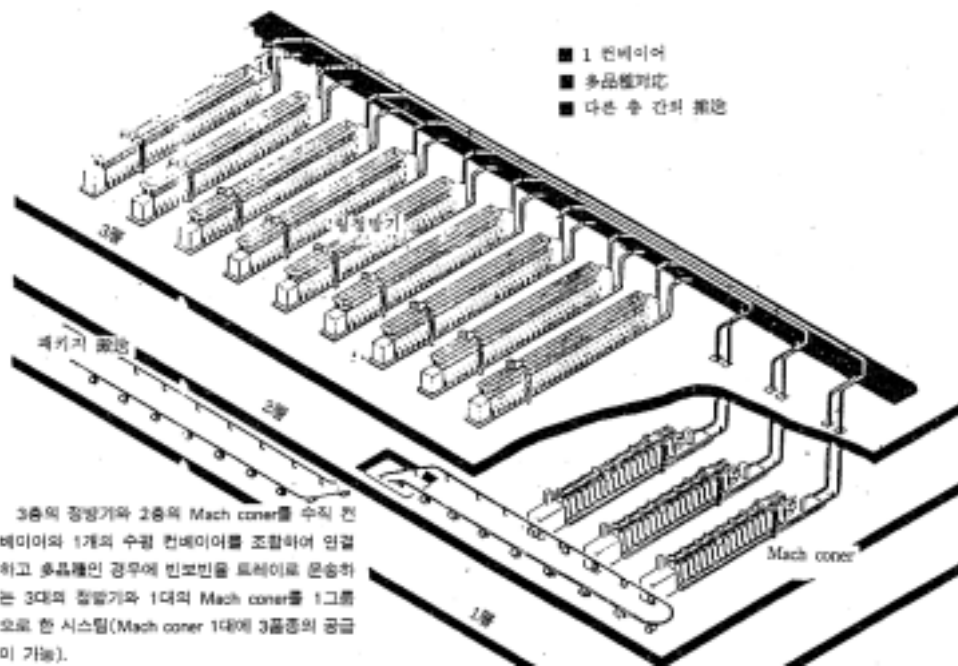

< 27> 6()

4.

가

가

가

가

○

(

),

(

)




< 28>

3 , 1 , 2
3

○ SKY-RAV

가

50kg 2kg 15
60m/min 2
(palletizing),

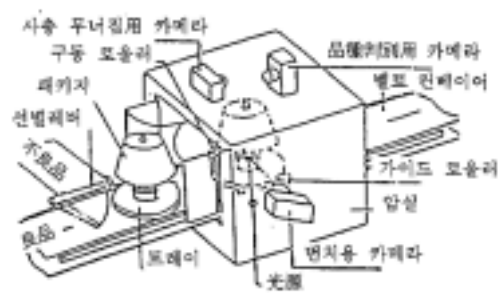

< 29>

가. -1()


가

(1),

(,

) 가

SKY-RAV

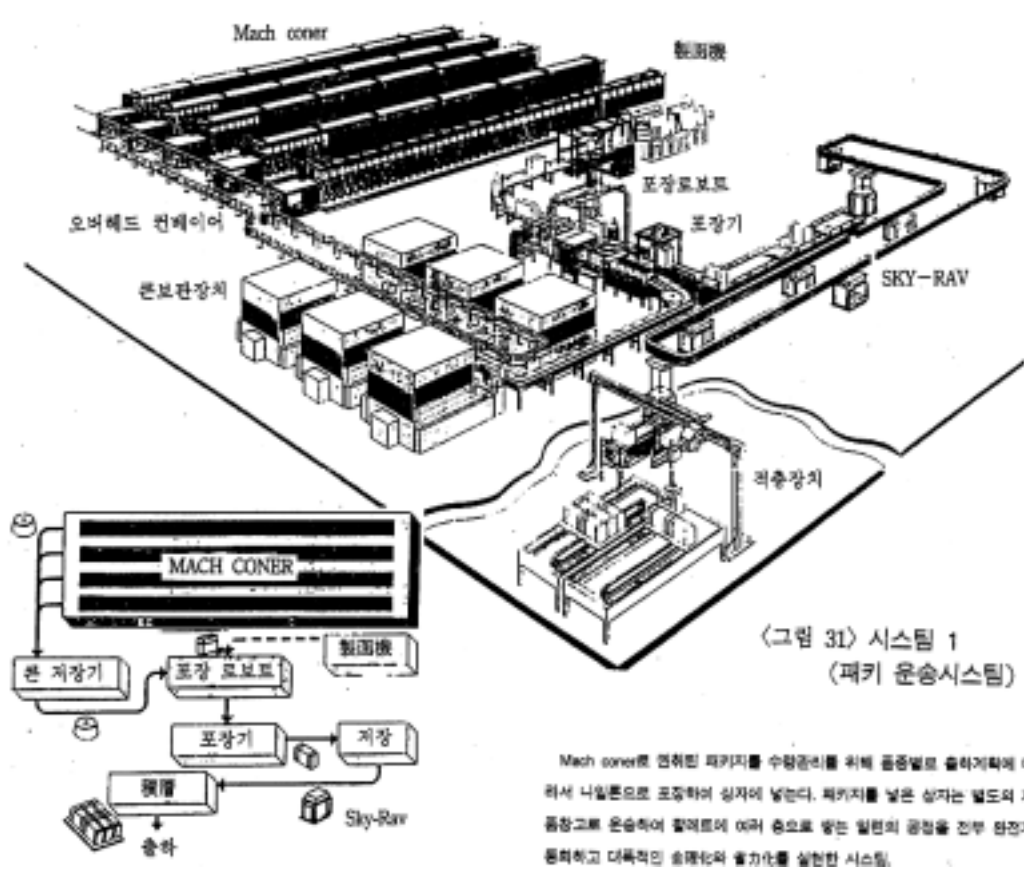


< 31> 1()



(규격)
 搬送重量 50kg(～500kg)
 走行速度 160～6m/min
 昇降速度 25～6m/min
 停止精度 ±3mm
 상승높이 2500mm
 軌道 平面/R 1000
 制御方式 車自己制御方式
 電源 3相 AC 200/220V

< 30> SKY-RAV

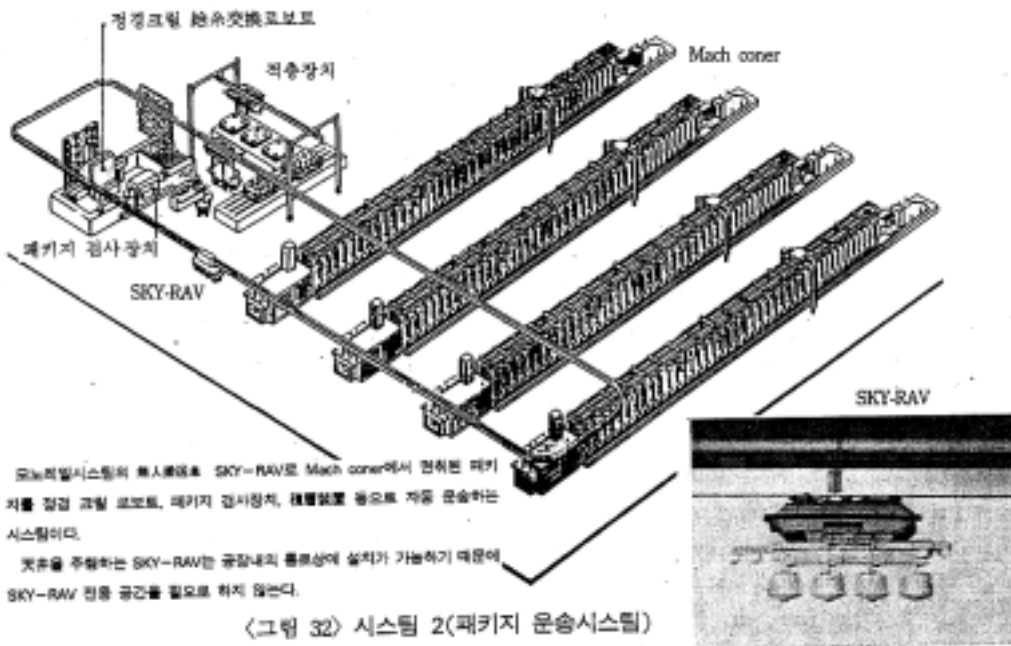

< 32> 2()

가

5. CIM

가

가

가,

가,


가,

가,

가

, ,

가

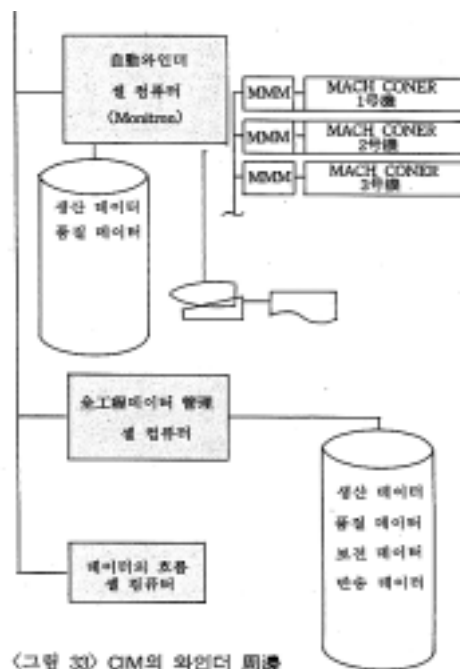

〈그림 33〉 CIM의 와인더 周邊

< 33> CIM

MMM

가 ,

가

가

6.

가

가

가

CI(Company Image)

가

()

가

가

()

2 / (가)

, , ,

CIM