

(XI)


2) Zinser 319 319SL

가

， ， ， 油

槽封入， ，

가 .

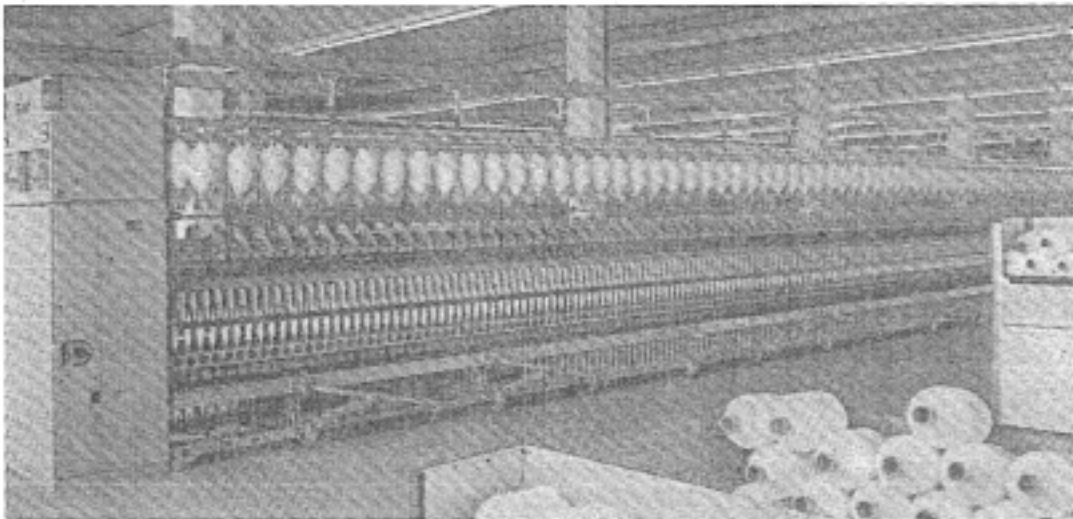

< 83> Zinser 319SL


， Zinser CO-WE-MAT

가 .

.

가


.

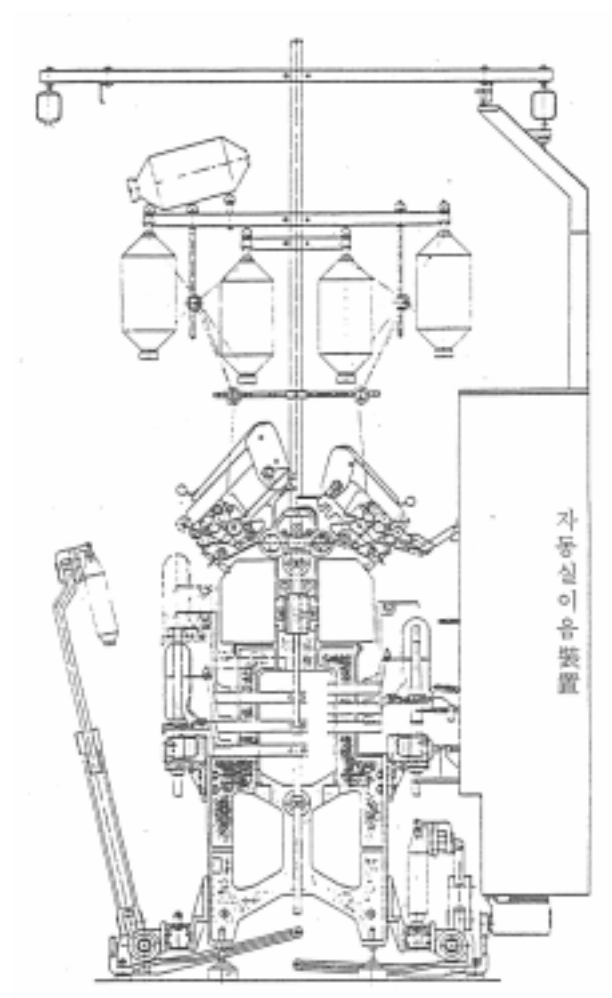

< 84> Zinser 319

CO-WE-MAT

가

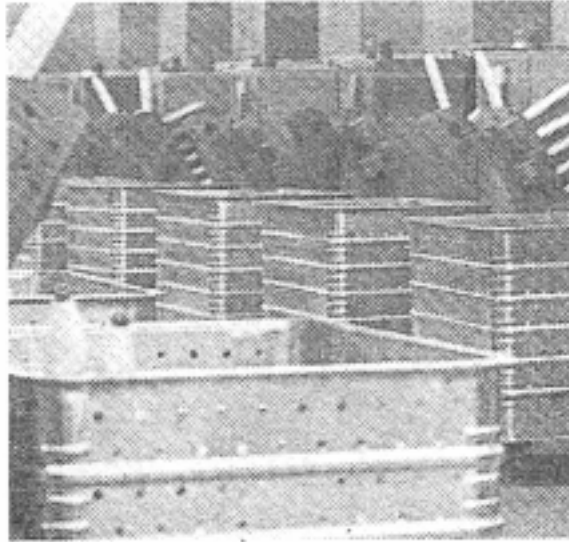

< 85>

()

3

, SKF

150mm

. 2

支指體

80

1~3

가

,

(swivel bracket)

가

가

가 . (spindle wharve)

가 . 가

± 1%

. Zinser SKF

1 : 3 ~ 1 : 8

가 .

가 .

(tin roller)

(tin pulley)


齒車音

가

. Zinser 'FIL-A-MAT'

가 , . < 84>

, < 86>

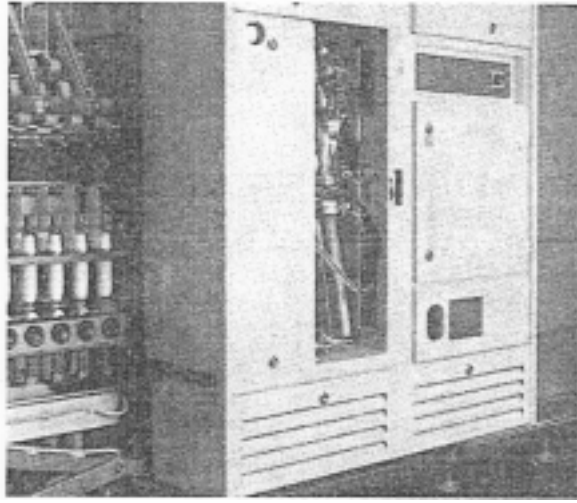

< 86>

FIL-A-MAT 2 . 1 가

가 , .

U

. ,

.

가 ,

가 ,

製 (< 87> 円形)

.

,


.

.


가 가 .

.

< 88>.

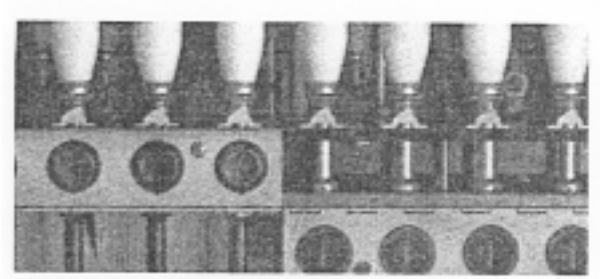

< 87> ()

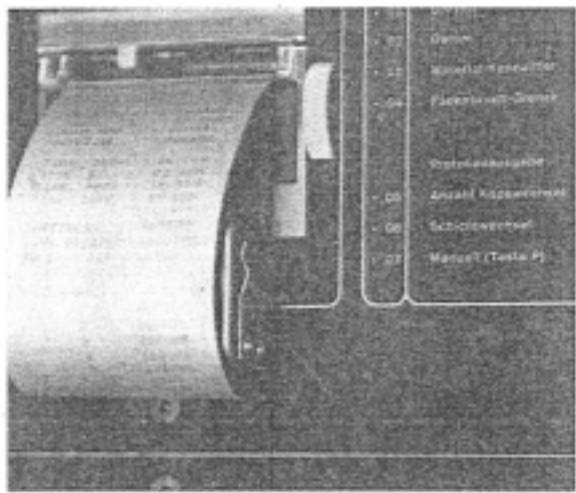

< 88>

가

가

.

,

,

.

.

가 . <
 89>가 , 30 .




< 89>

3) Zinser 320

319 .
 1,200 , ,
 , , ,
 (FIL-A-MAT),
 ,
 . < 90> .
 319 ,
 . ,
 ,

가
 共有同調回轉 가
 가 < 91>
 가 (30%)

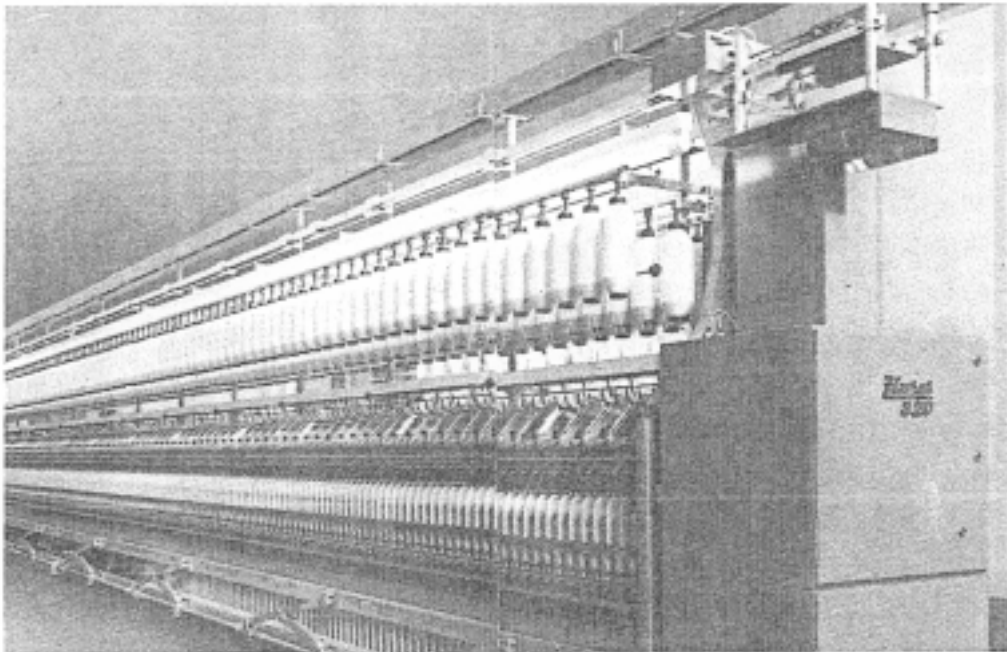


< 90> Zinser 320

가 ,
 가 ,
 가

. < 91>


. < 92>

CO-WE-MAT 319

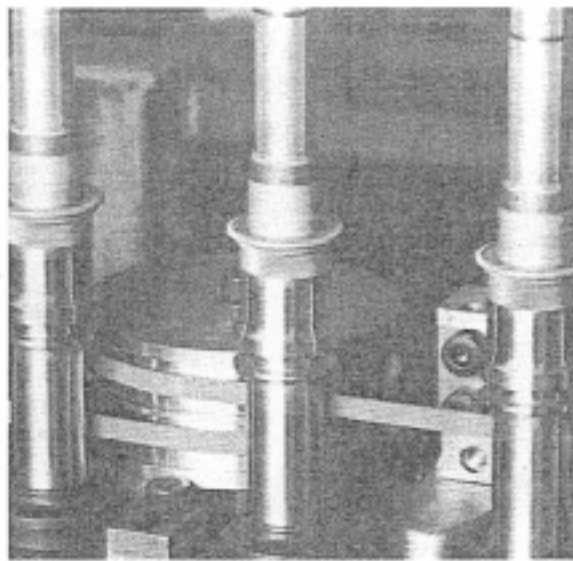

< 91>

(,)

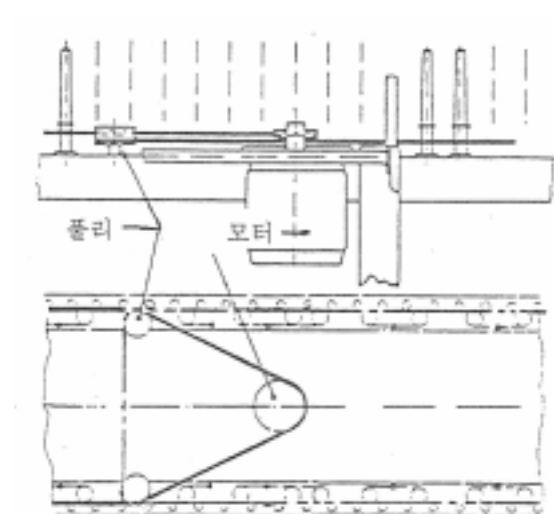

< 92> (: , :)

< 89> 319 .


가 .

1


가 . < 93>

. , < 94>

.

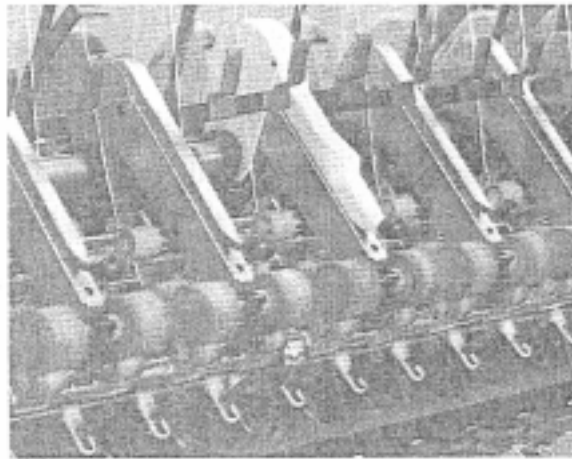

< 93> ()

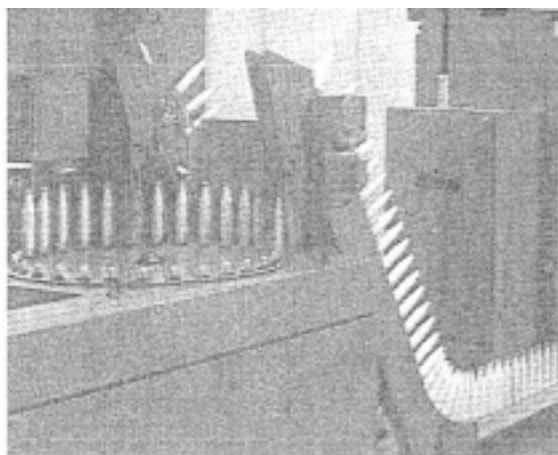

< 94> 320

.

가

.

800mm,

70~110mm,

220~300mm,

42~75in,

100~2,000 Dr/m(2.5~50tpi),

Ne 5~118(Nm 8~200),

3

80mm

150mm

가

.