

- 1.

(8) -

3.

3.1


(1) SLM(sliver lap machine)

1)

(lay out)


9"

. < 3-1>

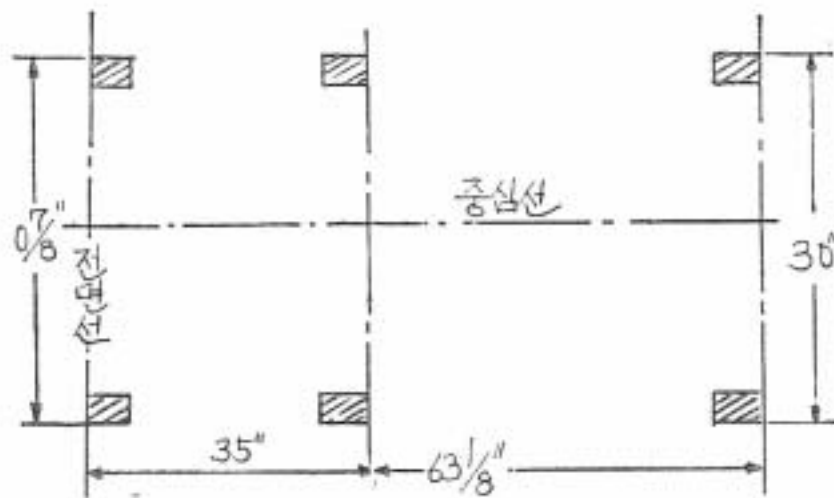

< 3-1> SLM

< 3-2> (rieter) SLM 24"

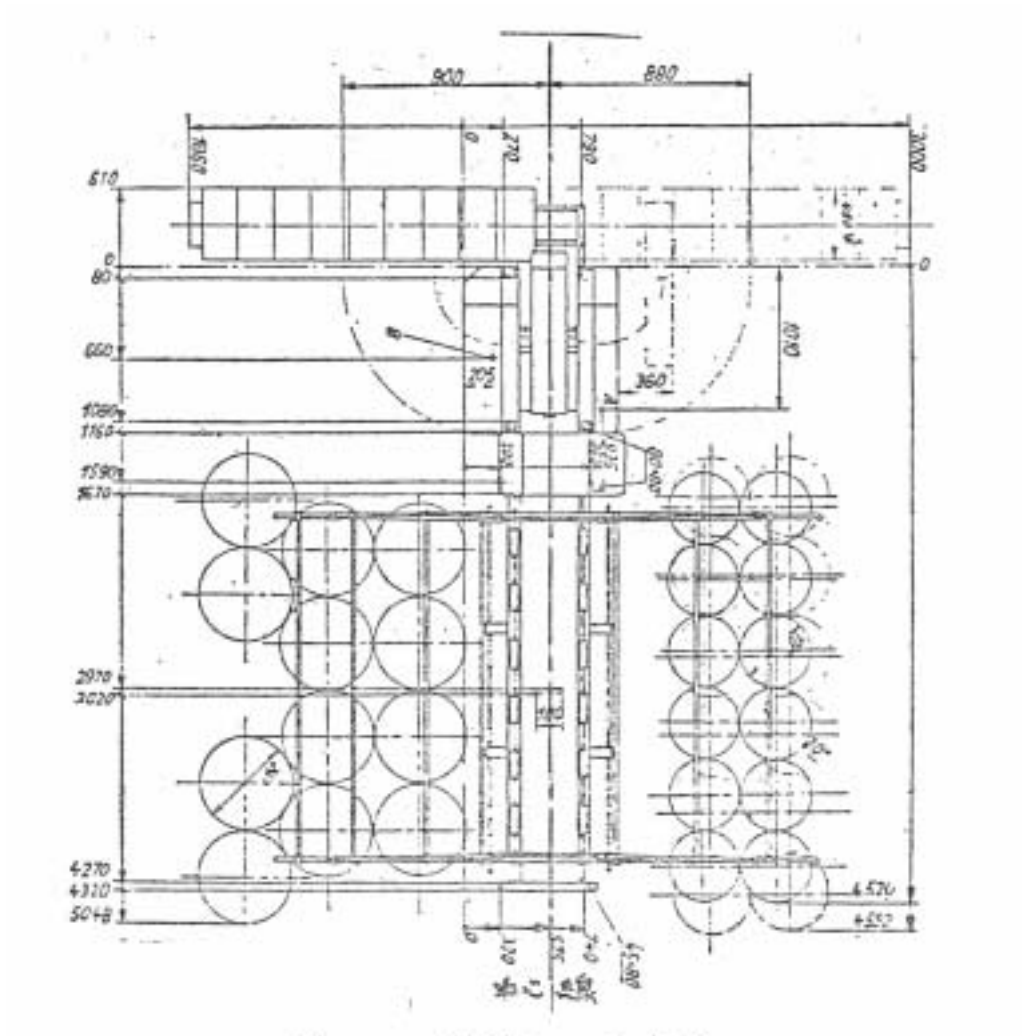

< 3-2> SRM(Rieter E2/4A)

2)

(back stand)

V

가

.

3)

(packing)

.

1/2"~1/4"

(lap mandrill)

.

. V

.

가 가

.

2ft~4ft가

.

가

가

가

(mortar)

.

(2) RLM(ribbon lap machine)

1)

(lay-out)

,

14 5/8"가


(beam)

(beam 1/2) 4 13/16"가


157 7/8"가

. < 3-3

>

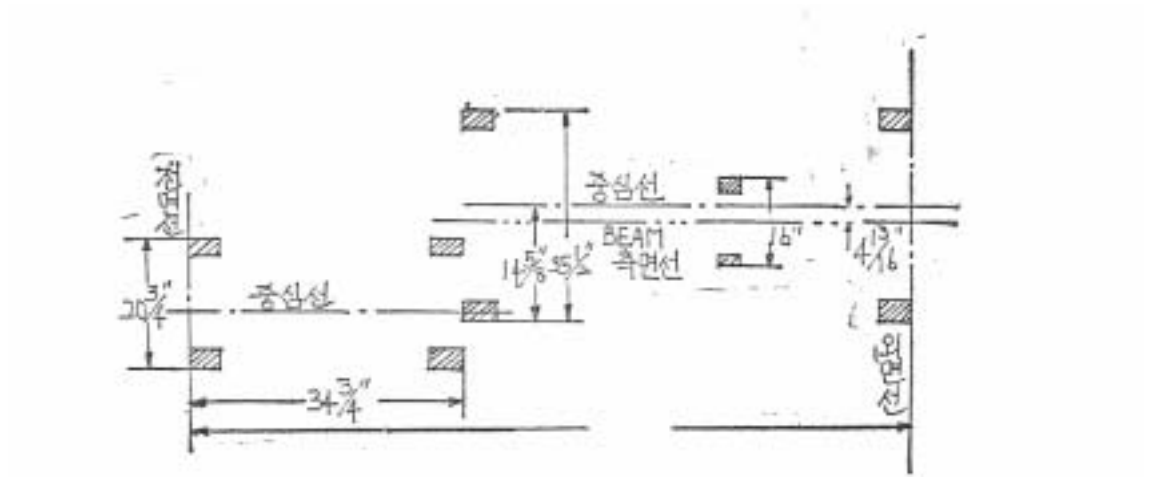

< 3-3> RLM

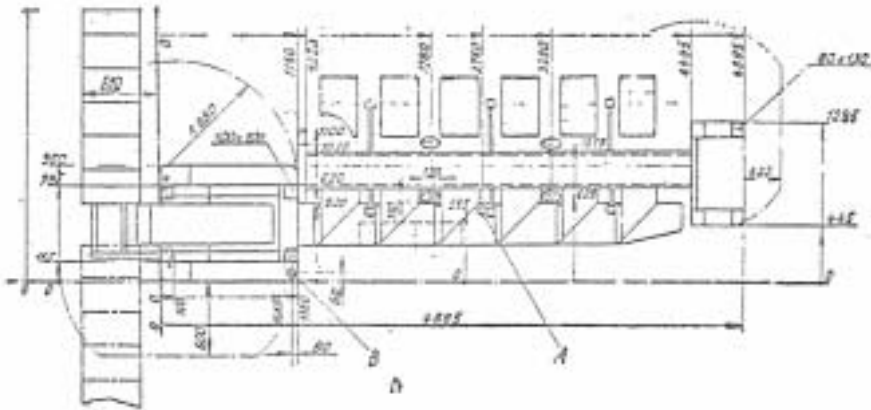

< 3-4> RLM (rieter E4/1A)

2)

a)

(calendar roller stud)

(20T × 40T)

·

b)

,

(spring piece)

·

.(30T

.)

(coupling bracket)

,

,

,

,

(seat

iron stop BKT)

(Weight wire)

,

2

24lbs

2

26lbs

·

c)

(SLM

)

·

1"/2~1"/4

·

·

2

1"

(1"-pole)


·

가 가

(3)

1)

(G, E foot) (8 3/4" ×
1/2") , 4 3/8" . (fan)
< 3-5> .

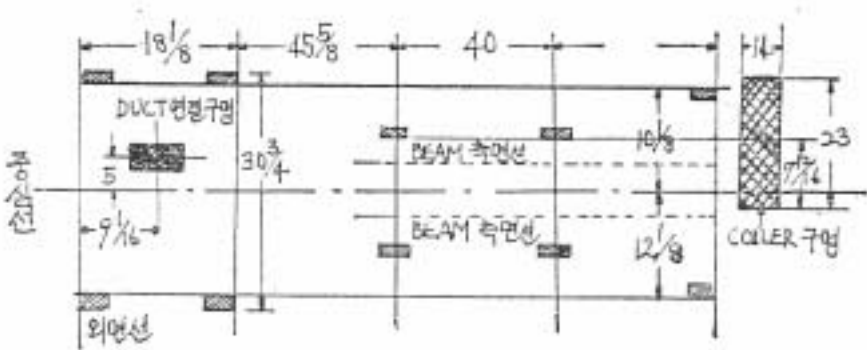

< 3-5> Comber
) < 3-5> (can dish plate)

,
4" ,
2"

2)

가

.

.

.

(hand

wheel bracket)

.

.

3)

.

1"

()

2

가

.

가

가

.

() Φ

.

②

(square)

.

③

.

④

,

,

.

6 가 가

.