

- 1. (11) -

f) (leather covered roller)

Φ

(A) (A')

(N190)

(N181)

25CBS

(cast iron fork lever)




< 3-24 >


2

(N196)

(N198)

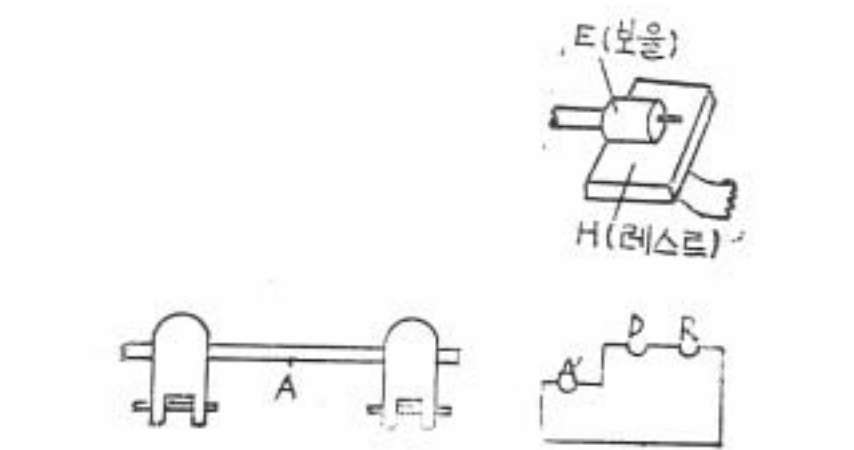

< 3-25 >

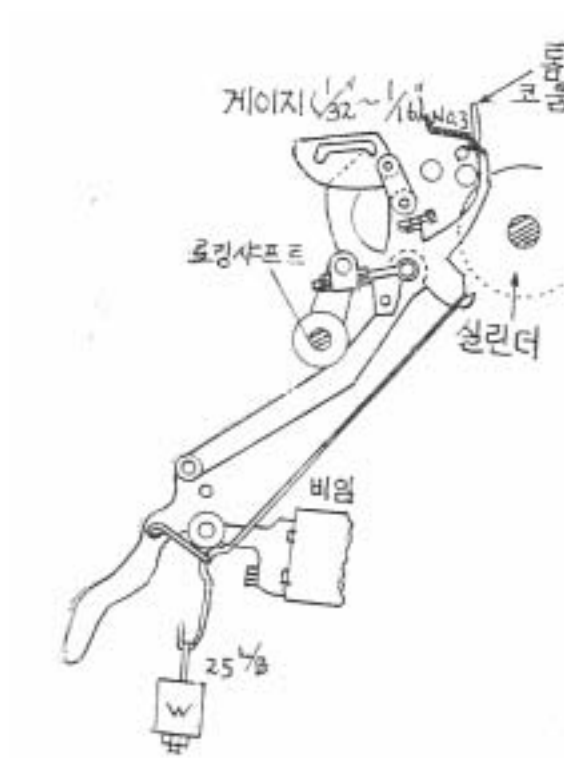

< 3-26 >

③ ; 19(< 3-26>)

1/32"~1/16" (6), (17)

. 가

.

④ ; 25(< 3-26>

)

< 3-9> (N) (25)

가 .

.

⑤ 5/16"~3/8" . ((19)).


가 .

⑥

가

가

.



< 3-27>

가 (brass selvedge guide)

< 3-27> 가

.

g) (table calendar full can stop motion)

.

,

.

가 ,

,

.

⊕

가

가

.

가

(notch)가

.

⊗

,

.

가

(32)

(trumpet tail)

.

11/4"

.

(19)

1"

11/4"

.

⊙

가

가

(32)

가

ㅁ

) ㄷ

5/6

(balance weight)


○

ㅁ 가

h)

(

.)

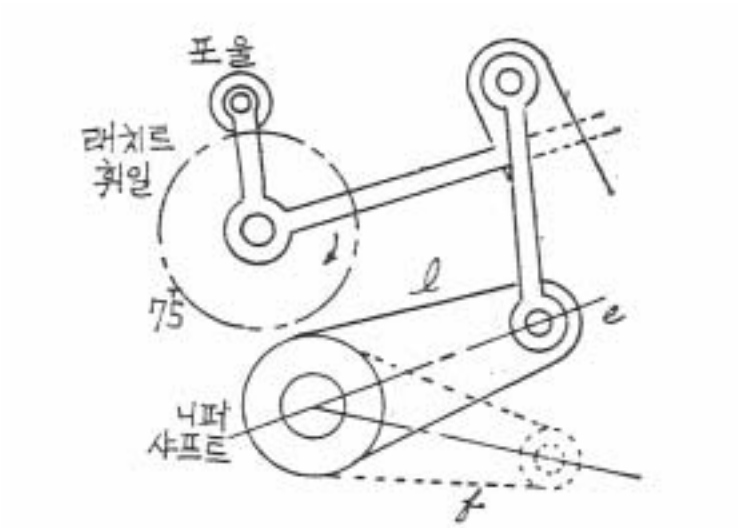

(l) (e) (f)

가 .

(27) 가

3T . 10

1/2" 1/4" 10 3/4" (shroud)

, (lap conductor) 가 가 (

35 1/4)

.

i)

(cross shaft B. K. T) (tail end B. K.

T) 가 가 .

, , . ,
(carrier

wheel) . (draw box)

, 가 .

j)

(foundation box)

(coiler body), , (up-light shaft),

52T .

(51/2")

62T 88T 가

. (

), (can dish wheel) 가

, (angle BKT)

. 1 3/16" ~ 1 7/8"

, .

(mortar)

.

k)

(7) .

가

가 . (23)

. 가 가

가

,

3/64" 30.5

.

) 관 .

○ .

1) (suction pipe and perforated roller)

, , , ,

.

, 1T 2Tfh .


9"

< 3-29>

(waste presser BKT)

2" , (coupling piece)
(damper)

(fleece)

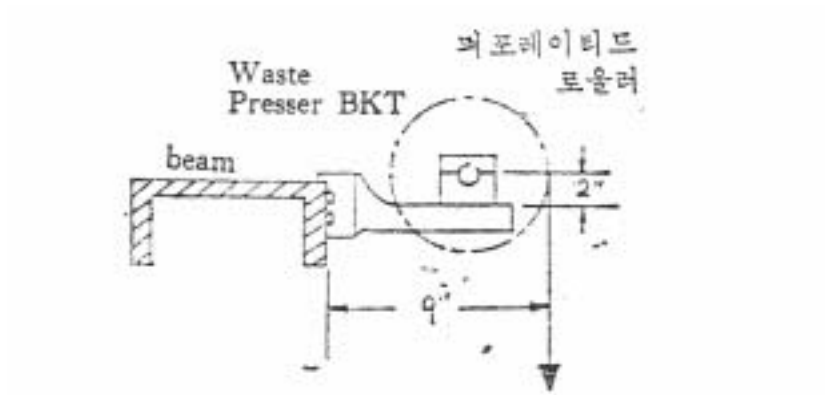

< 3-29>

m) (fan)

(food)

o) (25~27)

•

.

•

•

•

•

•

•

가 가 .

, .

(safty bar) 가 가 .

.
c) 가

. (.)

d) .

(teeth) 가 가

.

e) 가 가

가 .

f) .

가 . ,

, .

ㅁ , 가

.