

- 1. (12) -

(4)

가

.

40

5, 10, 15...

.

,

J

20

가

.

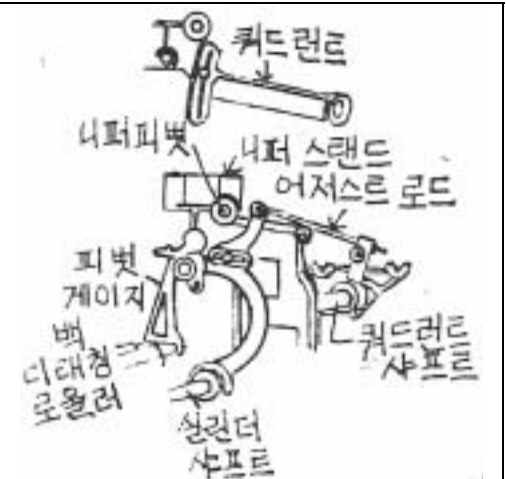
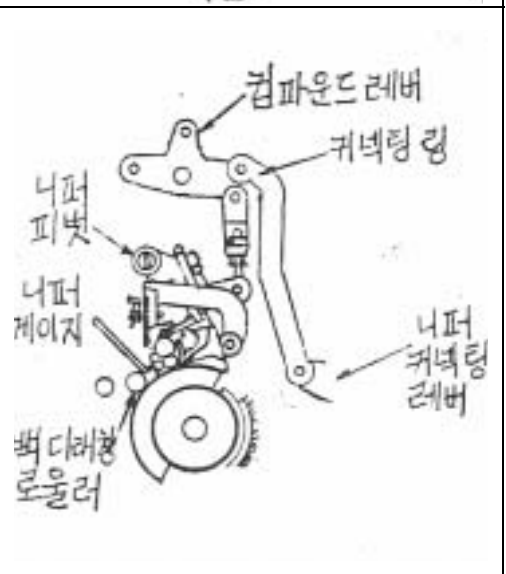
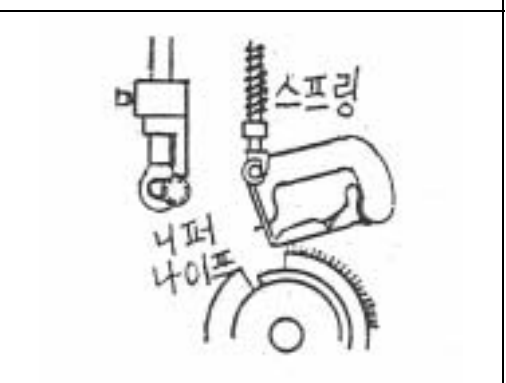
,

,

가

.

		$37 \frac{1}{4}$ 19 가	

		(quadrant mark) 3 가	No. 6, 7	
		(19) $\frac{1}{4}$ (adjust screw) ((3))		
		(27) (spring connecting rod)가		
		(27) (blowl lever)가 T (3T)		

		(19) ~ $\frac{1}{16}$ " ~ $\frac{7}{8}$ " 가 가 . T T $\frac{1}{2}$ 가 . $3\frac{1}{2}T$ (lock nut) 가 .	
		30 $\frac{3}{4}$ 20/1000 " . , .	

		$\frac{1}{32} \sim \frac{1}{16} \text{ "}$ (0.8~1.6mm) 가 (air strip) 가 $\frac{1}{32} \text{ "}$ (0.8mm)가	
		(19) (73~75°), 가 $\frac{1}{16} \text{ "}$ (1.6mm)가 . 가 $25/1000 \text{ "}$ (0.635mm)가 .	
		(14) 가 . (12) () (16) . 가 .	

		① (40) 가 ② (40) 가 ③ 가 25~40 30~35 (clearance)가 ①, ②, ③ 가 가	
		(25) 가	

(5)

1)

a) ((head nipper pivot)

가 . 가 .

b) No. 7 $3/8" \sim 1/2"$

(semi-comber) .

c)

가 . 1
 $1/32"(0.8mm)$ 가 .

2)

a) 가 (40)

($1/5$)

b) , 가 . ,
 가 ,
 .
 ,
 .
 가
 (nip point) .
 가
 . 가
 가
 .
 .
 가
 .
 .
 가

3)
 a) (comb operating arm)

b) .

4)

(27)

.